

高嘉地毯

上海制造


粉彩


國家標準起草單位
源自一九九七年上海地毯




粉彩 -101-102-103-104-105-106-107
粉彩 -108-109-110-111-112-113-114
粉彩 -115-116-117-118-119-120-121








粉彩 -01-35-108-109



粉彩-03-35

1:1



粉彩 -85-105-108-119




粉彩 -11-32-36-116-118




粉彩 -03-11-36-106




粉彩 -36-107-105-104




粉彩 -02-03-11-36




粉彩-81-83-84-102-103



粉彩 -32-106





粉彩 -03-105-120




粉彩 -36-81-111-112-114



粉彩 -83-84-105


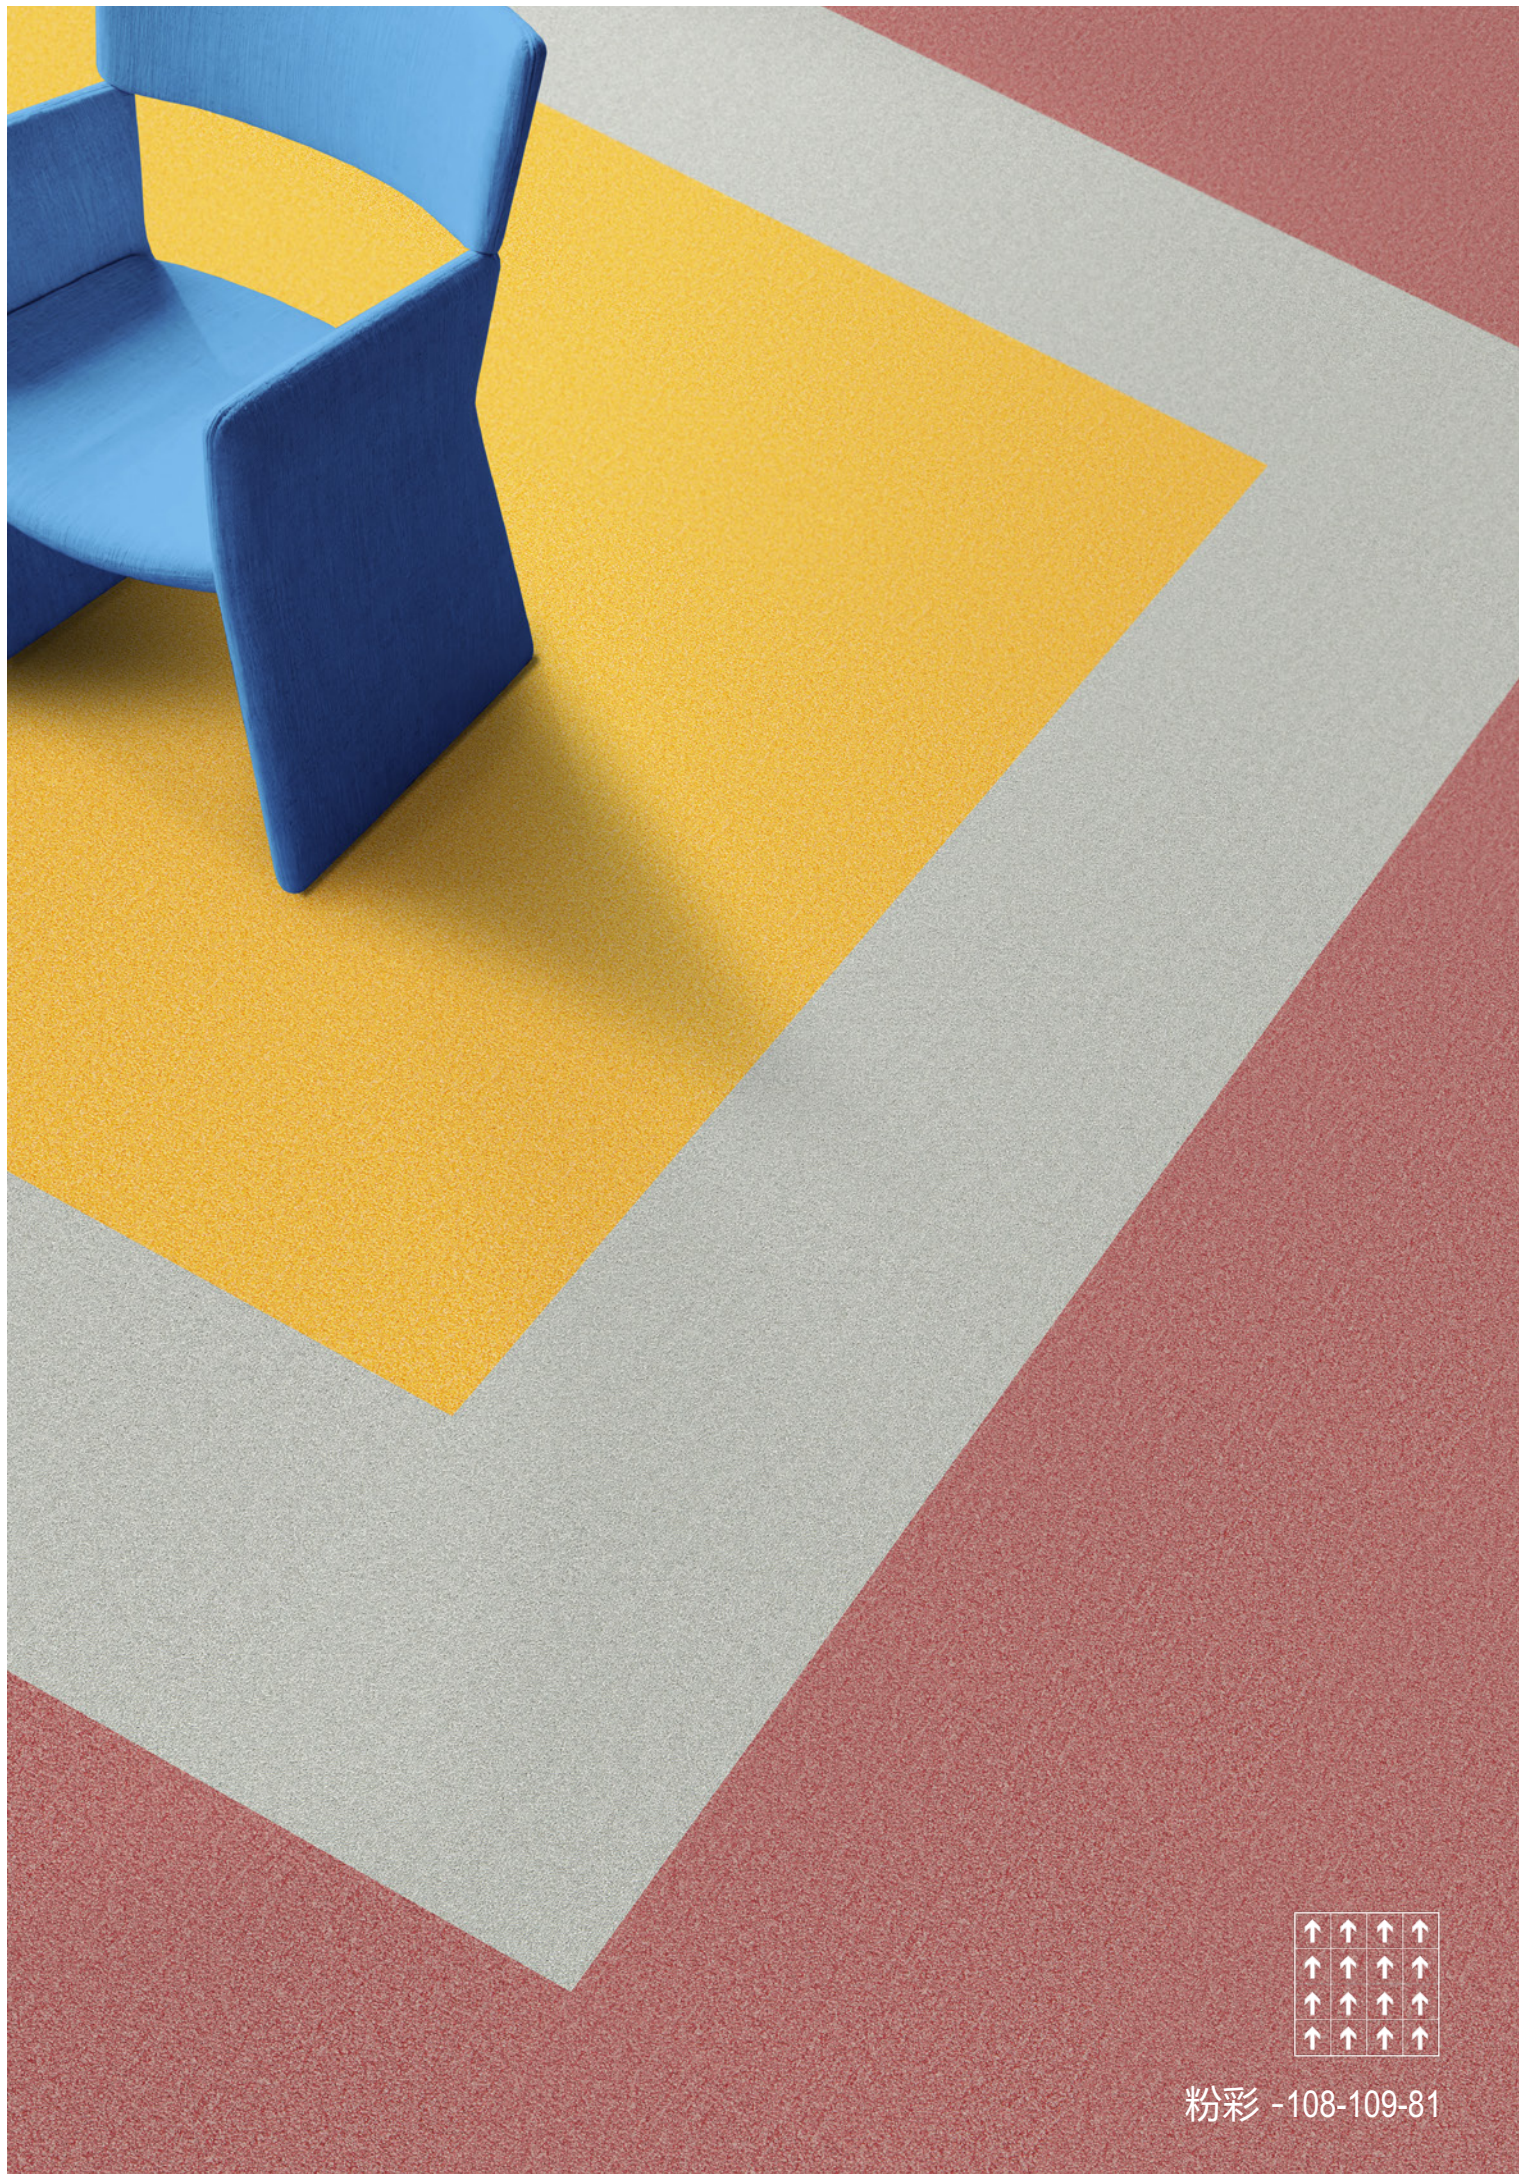


粉彩 -108-109-81




粉彩-03-11-32-36-107-109


1:1.5:2.5:2:2:1

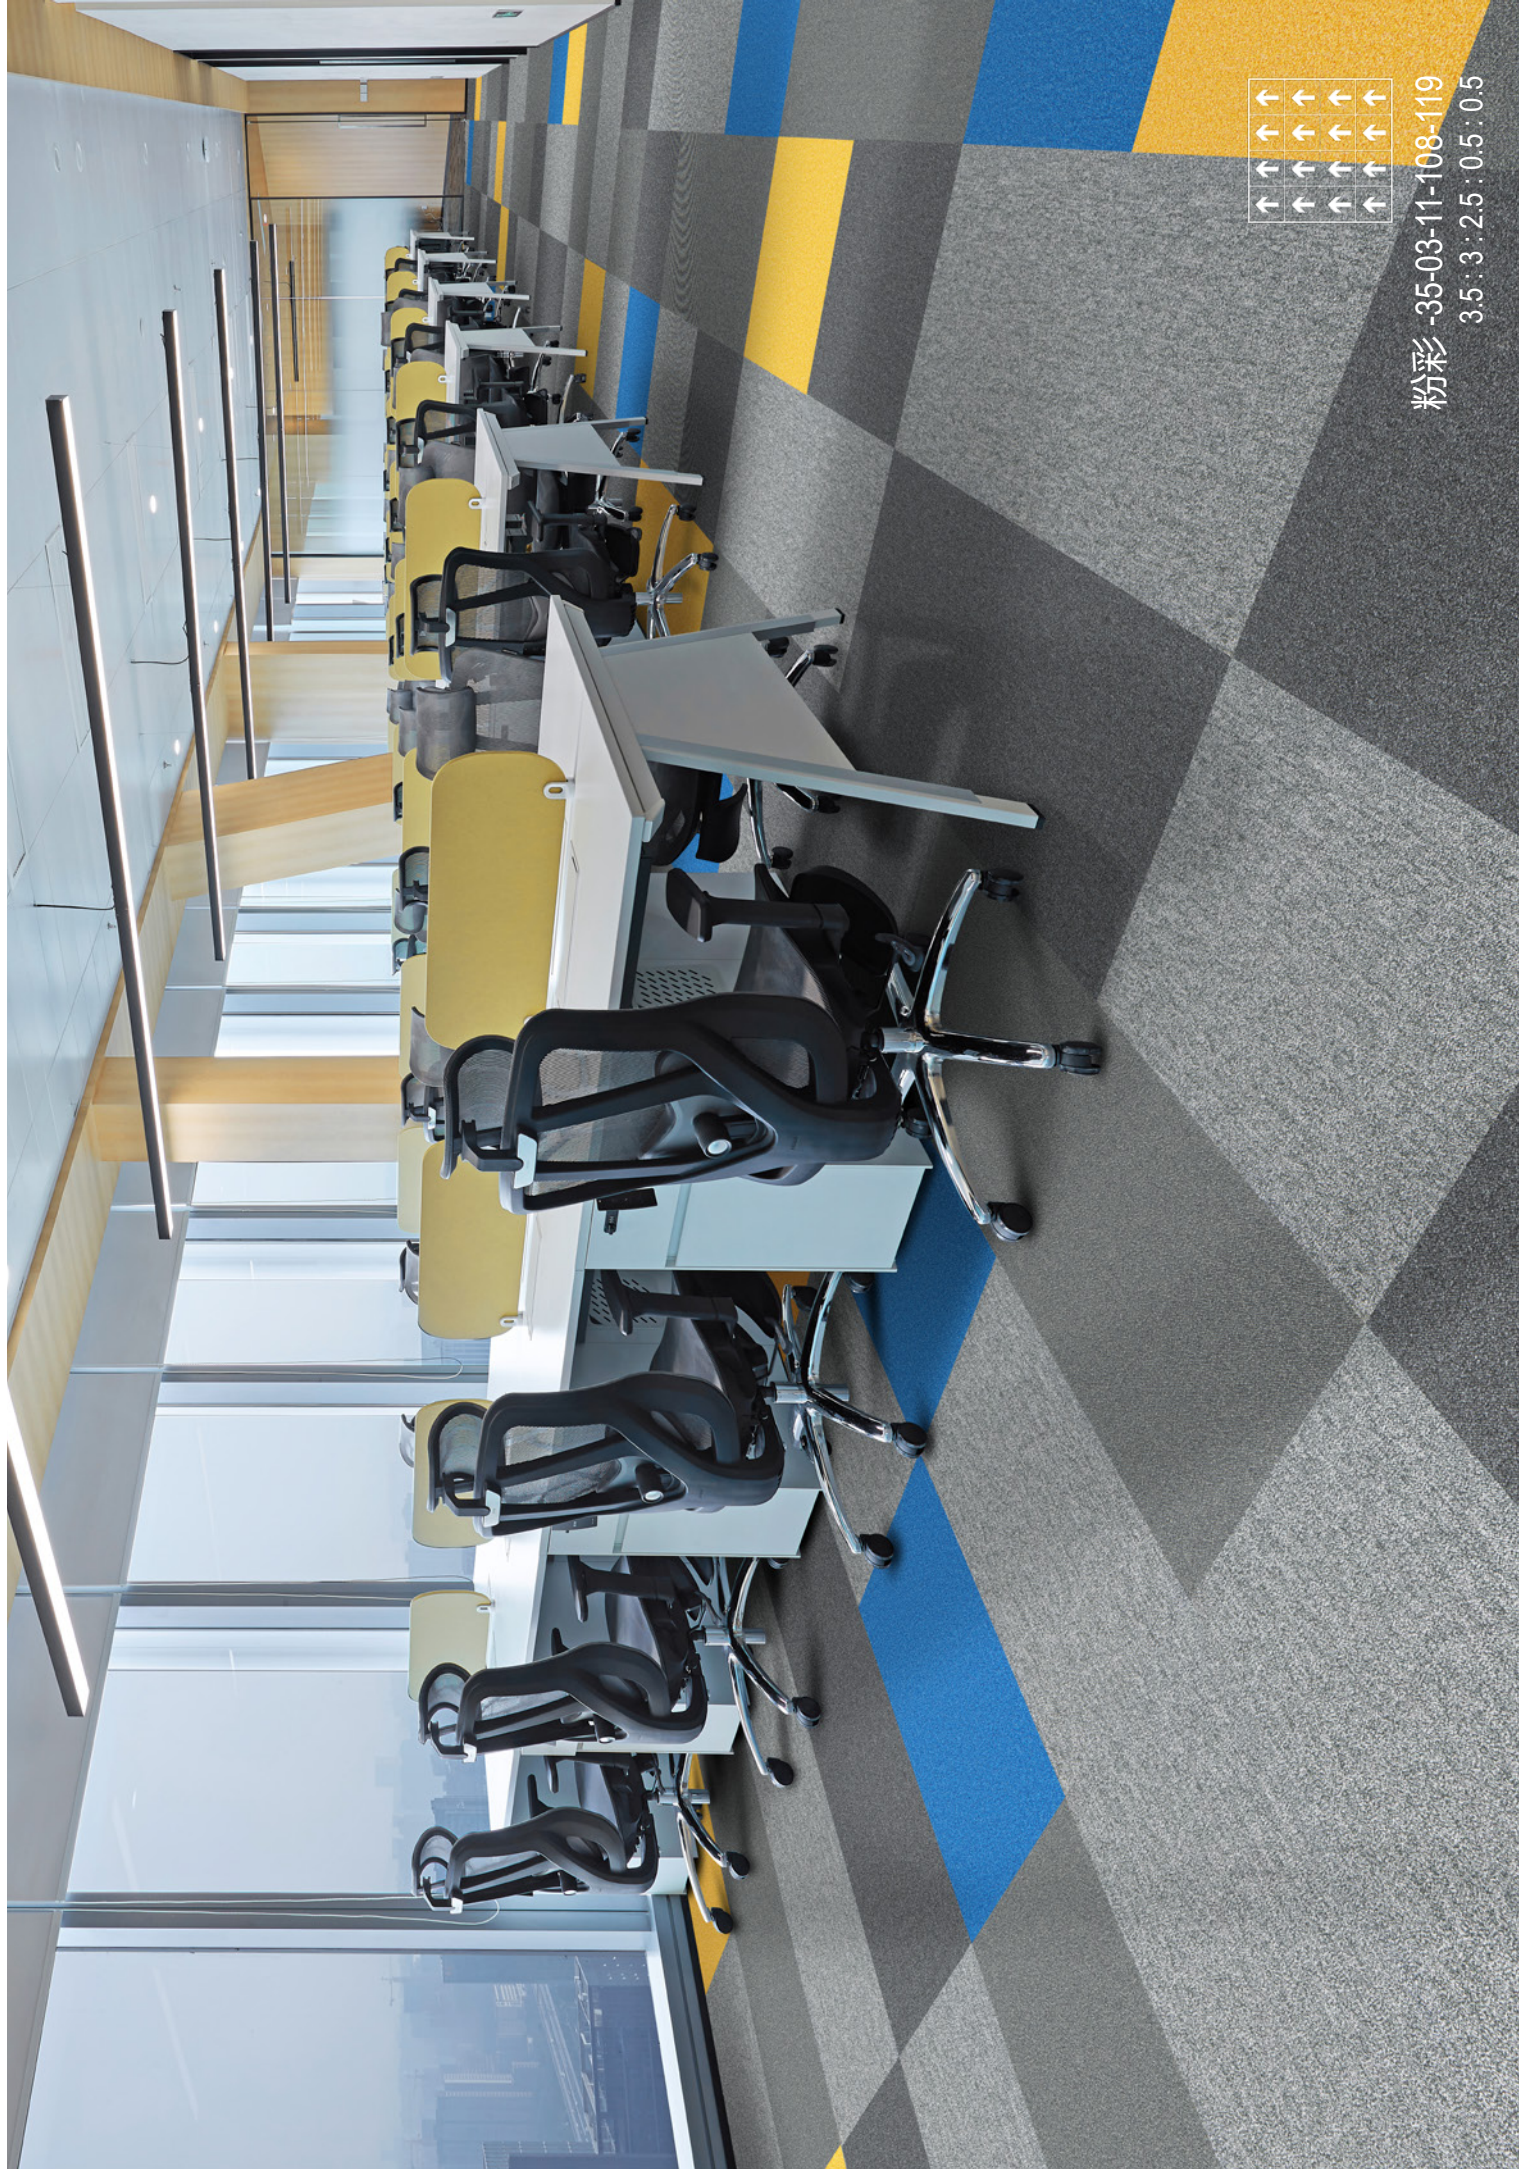


粉彩 -35-03-11-108-119
3.5 : 3 : 2.5 : 0.5 : 0.5



粉彩 -02-03-35
1:2:1



粉彩 -102-103
1.3 : 8.7



粉彩 -32-102-105-108-119-120

1:15:2:25:1:2




粉彩 -03-11
1:1




↑	↑	↑	↑	↑
↑	↑	↑	↑	↑
↑	↑	↑	↑	↑
↑	↑	↑	↑	↑


粉彩 -110-111-113-114-115-81-82-85




粉彩 -84-83-36-11




粉彩 -32-36-119-120-121



粉彩 -101



粉彩 -102




粉彩 -103




粉彩 -104



粉彩 -105



粉彩 -106



粉彩 -107



粉彩 -108



粉彩 -109




粉彩 -110




粉彩 -111




粉彩 -112




粉彩 -113




粉彩 -114




粉彩 -115




粉彩 -116




粉彩 -117



粉彩 -118




粉彩 -119




粉彩 -120



粉彩 -121



粉彩 -01



粉彩 -02



粉彩 -11



粉彩 -03




粉彩 -36




粉彩 -35



粉彩 -82




粉彩 -85



粉彩 -81



粉彩 -84



粉彩 -83




粉彩 -32


Specification 技术指标

Product Name 产品名称	粉彩
Product Code 产品编码	LAGOM 133
Tufted construction 簇绒结构	Level Loop 平圈
Fiber 纱线	100% Nylon 100% 尼龙
Dye method 染色工艺	Solution Dyed 原液染色
Gauge 针距	5/64
Tufted weight(g/m²) 绒重 (克 / 平方米)	550 ± 5%
Tile size(mm) 地毯尺寸 (毫米)	500 x 500
Pile height(mm) 平均绒高 (毫米)	4.0 ± 0.5
Total thickness(mm) 总厚度 (毫米)	6.5 ± 0.5
Standard Backing 标准底背	Glass fiber reinforced PVC

Recommended installation methods 建议铺装方式



Monolithic
顺铺



Quarter-turn
对角铺



Anti-fouling



Anti-static




Environmental



Passed various tests



Fashion colors



100%B,C,F Yarn



Reduced Flammability



Isolation acoustic



Colorfast



Chair roulettes



No edge ravel



Wear resistance



Soil Resistance



Wear Warranties



Dimensional Stability



Long life-span



Easy to transport



Non-moid