


高嘉地毯

上海制造

和风

丽日

國家標準起草單位
源自一九九七年上海地毯



和风 -01-02-03-04-06



和风-01-02-03
6:2:2




和风-03







和风-06





和风 -04-06
1:1





丽日-02-03
6 . 4






和风 -04




和风 -06




和风 -01

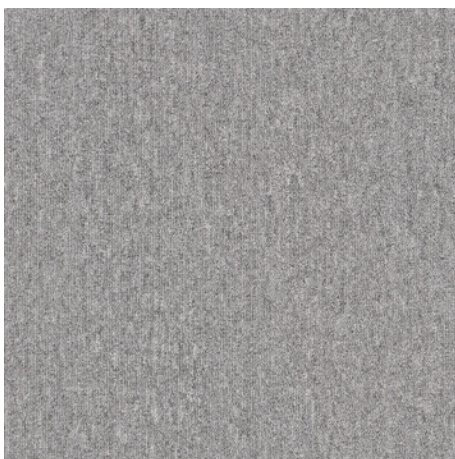


和风 -02

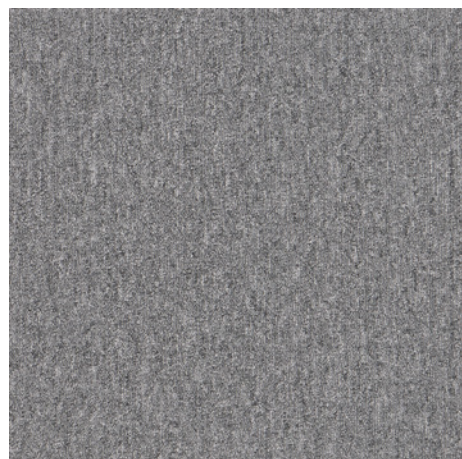

和风 -03

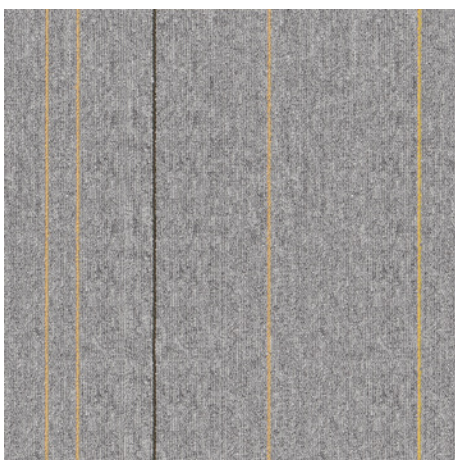

丽日 -02

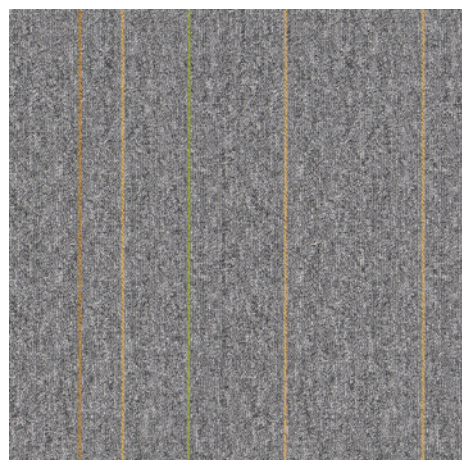


丽日 -03


Specification 技术指标

Product Name 产品名称	和风
Product Code 产品编码	LAGOM410
Tufted construction 簇绒结构	Level Loop 平圈
Fiber 纱线	PNMIX®
Dye method 染色工艺	Solution Dyed 原液染色
Gauge 针距	1/10
Tufted weight(g/m²) 绒重 (克 / 平方米)	440±5%
Tile size(mm) 地毯尺寸 (毫米)	500 x 500
Pile height(mm) 平均绒高 (毫米)	3.5 ± 0.5
Total thickness(mm) 总厚度 (毫米)	5.0 ± 0.5
Standard Backing 标准底背	Glass fiber reinforced PVC

Recommended installation methods 建议铺装方式



Monolithic
顺铺



Quarter-turn
对角铺



Anti-fouling



Anti-static




Environmental



Passed various tests



Fashion colors



100%B,C,F Yarn



Reduced Flammability



Isolation acoustic



Colorfast



Chair roulettes



No edge ravel




Wear resistance



Soil Resistance




Wear Warranties



Dimensional Stability



Long life-span



Easy to transport




Non-moid


Specification 技术指标

Product Name 产品名称	丽日
Product Code 产品编码	LAGOM411
Tufted construction 簇绒结构	Level Loop 平圈
Fiber 纱线	PNMIX®
Dye method 染色工艺	Solution Dyed 原液染色
Gauge 针距	1/10
Tufted weight(g/m²) 绒重 (克 / 平方米)	440±5%
Tile size(mm) 地毯尺寸 (毫米)	500 x 500
Pile height(mm) 平均绒高 (毫米)	3.5 ± 0.5
Total thickness(mm) 总厚度 (毫米)	5.0 ± 0.5
Standard Backing 标准底背	Glass fiber reinforced PVC


Recommended installation methods 建议铺装方式



Monolithic
顺铺



Quarter-turn
对角铺



Brick
左右错半



Anti-fouling



Anti-static




Environmental



Passed various tests



Fashion colors



100%B,C,F Yarn



Reduced Flammability




Isolation acoustic



Colorfast



Chair roulettes



No edge ravel



Wear resistance



Soil Resistance




Wear Warranties



Dimensional Stability



Long life-span



Easy to transport



Non-moid